


## ADVANTAGES

- Flat-fold - easy to store when not in use.
- Individually wrapped – hygienic, protects the respirator from contamination before use.
- Meets all EN 149:2001+A1:2009 requirements and above!
- Including dolomite test - proven protection and comfort for a minimum of 8 hours.
- Extremely low breathing resistance with high filtration capacity -Best in class.
- Collapse resistant - ideal for work in warm and humid environments.
- Stays securely in place - provides a good, comfortable seal.
- 7 dynamic parts - excellent facial movement with maximum comfort.
- Soft foaming inside - comfortable on the skin.
- Special design nose dip - flexible even after prolonged usage and fits any nose shape or size.
- Elastic cotton headbands - no skin irritation
- Special designed exhalation valve - reduces heat, humidity and provides comfort.
- Comfortable, easy to use also with helmets, safety glasses, ear plugs etc.

## How to use

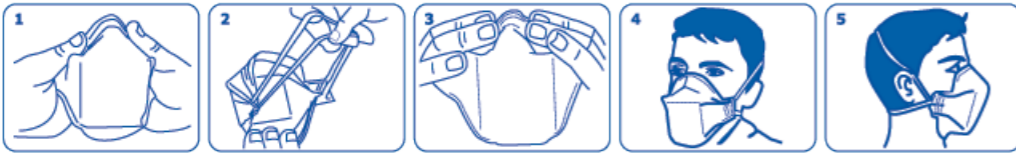

RSG Safety B.V.  
Marinus Dammeweg 38  
5928 PW VENLO  
THE NETHERLANDS

Tel: +31 (0)85 487 0395  
Email: [sales@rsgsafety.com](mailto:sales@rsgsafety.com)  
[www.rsgsafety.com](http://www.rsgsafety.com)

Company Registration No: 52505502

 [facebook.com/RSGSafety](https://www.facebook.com/RSGSafety)

 [twitter.com/RSG\\_Safety](https://twitter.com/RSG_Safety)

 [linkedin.com/rsgsafety](https://www.linkedin.com/company/rsgsafety)

 [youtube.com/rsgsafety](https://www.youtube.com/rsgsafety)

 [pinterest.com/rsgsafety](https://www.pinterest.com/rsgsafety)



## RSG FS Series Disposable Respirators

# Feel Free


# TO BREATHE®





7 different dynamic points

which provide excellent fitting

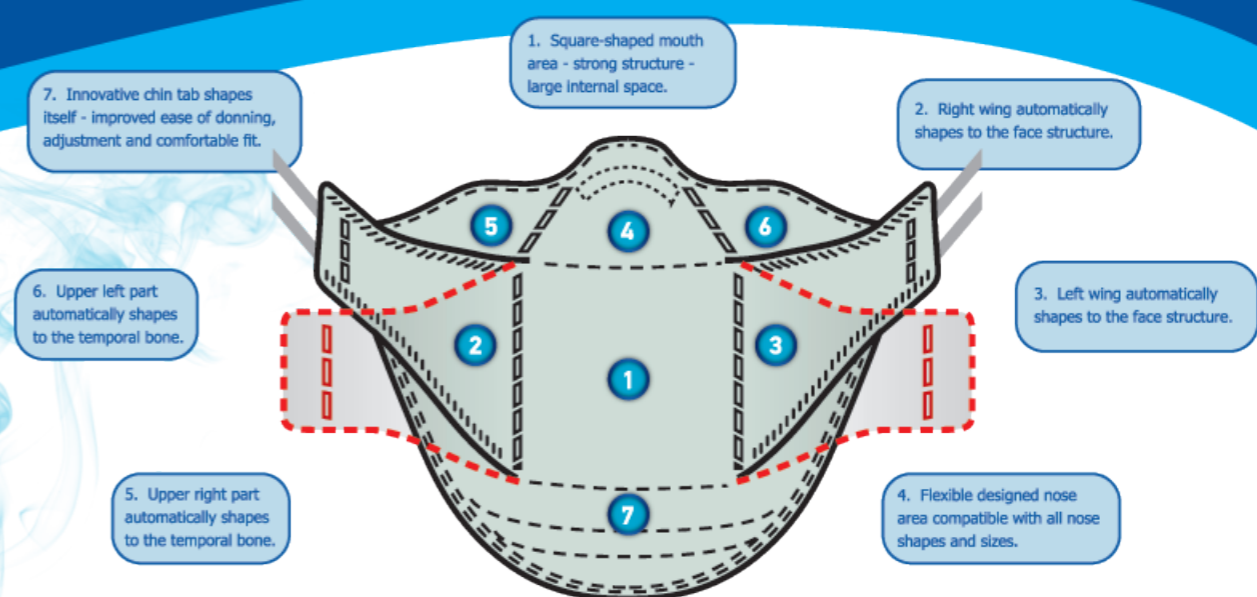

Feel Free

TO BREATHE®

**Breathe easy**

The RSG FS Series disposable respirators provide a low breathing resistance so you can breathe through your respirator with even less effort. When tested to EN 149:2001+A1:2009, at a flow rate of 95 liters per minute, the approximate mean inhalation breathing resistance achieved with the RSG FS respirators was 72% better than the maximum limit for an EN 149 FFP2 and 66% better for FFP3.

Making comfort up to 72% more breathable

Inhalation Breathing Resistance (95 l/min)			
Product	EN 149:2001+A1:2009 Requirement Limit (mbar)	Measured Mean (mbar)	lower breathing resistance
209225	FFP2 = 2.4	0.68	72%
209227	FFP2 = 2.4	0.68	72%
209235	FFP3 = 3.0	1.03	66%

RSG FS Series Respirators

	CODE	CLASS	EXHALATION	COLOR	Nominal Protection	Assigned Protection
	209225	FFP2 D NR	Yes	White	12	10
	209227*	FFP2 D NR	Yes	Grey	12	10
	209235	FFP3 D NR	Yes	White	50	20

\* Includes activated carbon against odours, gases and vapours below the OEL value

Each mask individually packed/ 10 pcs in a box! 24 boxes in a carton

**Designations:**

R = Reusable

NR = Non reusable (single shift use only)

D = Meets the clogging resistance requirements

Up till 72% lower breathing resistance

compared to EN 149:2001+A1:2009!

