

877-446-1519

safety & fall protection
solutions.

Ladder Safety Gate



FALL PROTECTON

 **PS DOORS**
SAFETY PRODUCT GROUP

PS DOORS


Safety Product Group

1150 S. 48th Street
Grand Forks, ND 58201
Phone (701) 746-4519
Toll Free (877) 446-1519
Fax (701) 746-8340

Email: 4psinfo@psdoors.com

Website: www.psddoors.com

 [facebook.com/PSDOORS](https://www.facebook.com/PSDOORS)

 PS DOORS Manufacturing



Mild Steel Gate with Powder Coat Safety Yellow (PCY)

www.psddoors.com

Application Use

- ▶ Ladderway Openings
- ▶ Stairwell Openings
- ▶ Equipment Access Ladders
- ▶ Scaffolding
- ▶ Mezzanines
- ▶ Working Platforms

Quick Facts

- ▶ Finishes/Materials Available:
 - Powder Coat Safety Yellow
 - Hot-dip Galvanized
 - Stainless Steel (304/316L)
 - Aluminum
- ▶ Food Processing Model is a sealed unit.
- ▶ In Stock for Quick Ship.
- ▶ Ships Fully Assembled.

Benefits

- ▶ Meets OSHA Standards
- ▶ Self-Closing
- ▶ Protects Openings
- ▶ Economical
- ▶ Quick & Simple Installation

Standard Features

- ▶ Dual Stainless Steel Springs
- ▶ 3.25" Gate Adjustment
- ▶ Reversible Swing Direction - Simply invert Gate.
- ▶ "Safety First" Placard. Warns personnel of fall hazard.

ISO 9001:2008
CERTIFIED

© 2012 PS DOORS All Rights Reserved

Rev. 082812



PRODUCT/MATERIAL CONFIGURATION


MATERIAL	FINISH	HINGE MATERIAL (up to 2" O.D. or flat)
Mild Steel	Powder Coat Safety Yellow (PCY)	Mild Steel *
Mild Steel	Hot Dipped Galvanized (GAL)	Mild Steel *
Stainless Steel (304)	Mill Finish (SS)	Stainless Steel *
Stainless Steel (316L) Food Processing Model	Mill Finish (SS) Seal Welded (SW)	Stainless Steel*
Aluminum (6061/5052)	Mill Finish (ALU)	Stainless Steel *



*The standard Universal Hinge Assembly is versatile, fitting various railing types, round or square, up to 2" O.D. or flat surface mounting. For railings which are larger or uniquely shaped we offer optional NO DRILL adapter kits to fit larger pipe, flat-bar and angle iron railing columns.
The self-closing feature employs two (2) Stainless Steel Torsion Springs.

GATE SIZING CHART & MODEL NUMBER

MODEL/ SIZE	GATE FITS OPENING (MIN) (MAX)	
LSG - 18	16-3/4"	20-1/2"
LSG - 21	19-3/4"	23 -1/2"
LSG - 24	22-3/4"	26-1/2"
LSG - 27	25-3/4"	29-1/2"
LSG - 30	28-1/2"	32-1/2"
LSG - 33	31-3/4"	35-1/2"
LSG - 36	34-3/4"	38-1/2"
LSG - 40	38 -3/4"	42 -1/2"
LSG - 44	42 -3/4"	46-1/2"
LSG - 48	46-3/4"	50-1/2"

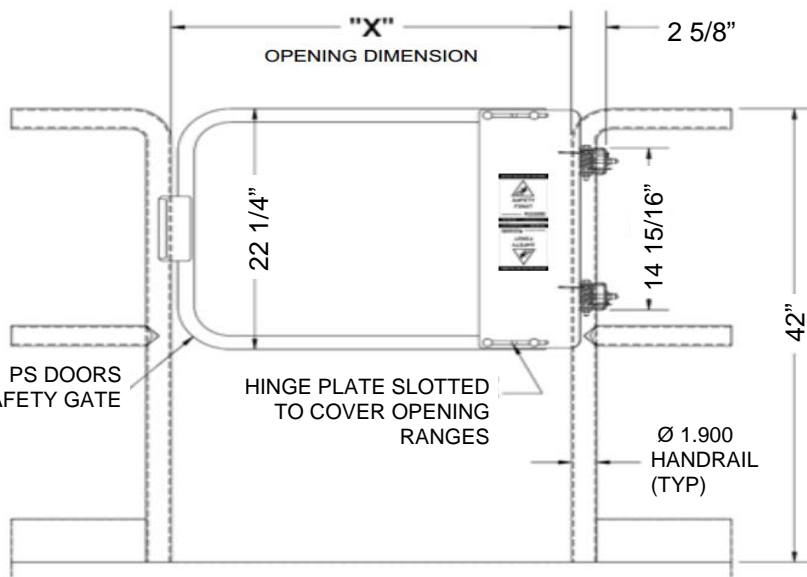

INSTALLATION:

Installation is a snap. Our gate comes fully assembled and includes U-bolts for standard installation. Requires only one 1/2" wrench and 5 minutes of your time for installation.

Chart shows minimum and maximum opening sizes for gates. Sizes are adjustable laterally up to 3.75" (-1.25" + 2.5" of nominal size) to ensure the gate fits properly in your opening for maximum safety.



PS DOORS

Safety Product Group

1150 S. 48th Street

Grand Forks, ND 58201

Phone (701) 746-4519

Toll Free (877) 446-1519

Fax (701) 746-8340

Email: 4psinfo@psdoors.com

Website: www.psdoors.com

What is the OSHA requirement?

OSHA Reference
29 CFR 1910.23 Guarding of floor and wall openings and holes.

"(a)(2) Every ladderway floor opening or platform shall be guarded by a standard railing with standard toeboard on all exposed sides (except at entrance to opening), with passage through the railing either provided with a swing gate or so off-set that a person cannot walk directly into the opening"